


23 Exhibition Drive, Malaga Western Australia


Monday - Friday 7am-5pm + Sat 8am-4pm

Sales Centre for Sales, Advice + Orders T +61 8 9209 7400 hello@beyondtools.com

25KG EVA HOT MELT ADHESIVE PELLETS SEMI FILLED IN NATURAL / **BEIGE 288-60 SERIES BY JOWAT**





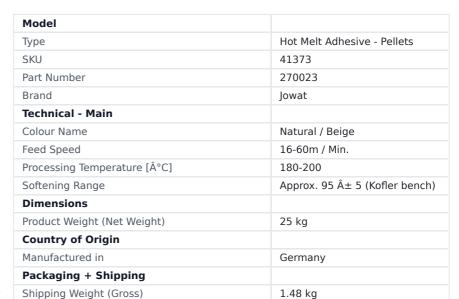

1.48 kg



For bonding edgebands for instance of HPL/CPL, polyester, resinated paper, solid wood and veneer. The special properties of the edgebands and the reverse primer application have to be tested before use (especially if thermoplastic edgebands are to be bonded). Can be used for the applications straight edges, precoating and softforming.

Characteristics / Directions for Use:-

Long open time, high hot tack, good adhesion and good heat resistance;

Excellent resistance to oxidation and colour stability in the melt.

Very good mechanical processing characteristics with accurate, string-free hot melt application. Processing on automatic units with roller View Data Sheet here.