


530MM (21") INDUSTRIAL THICKNESSER ILMENITE 530H BY TOUGH CUT

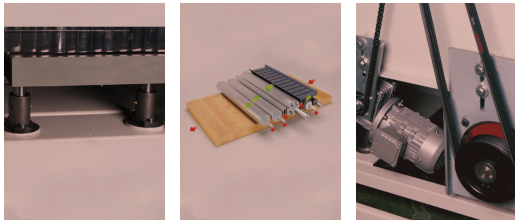

The very high work capacity from 5mm to 300mm allows optimum machine use and offers flexibility for wood machining. Ilmenite 530H has brought industrial features and design to this machine, including variable feed speed, electronic braking, digital height control and spiral cutter head with 4 sided cutting knives.

Features:

- Spiral Head Cutter Block (92 pieces)
- Variable speed infeed by inverter suit all types of finishes
- Motor drive table lifting mechanism with micrometric positioning
- Spring-loaded pressure bars and double outfeed rollers design prevents vibration of very thin workpieces during thicknessing
- Four trapezoidal thread spindles with dual guide rails guarantee accurate adjustment and avoid lateral movement during thicknessing
- Two bottom table rollers
- Electronic motor braking
- Sound insulation underside of the lid
- Matting protection on top of the lid to allow material to be pasted over the machine without causing damage to the workpiece

SKU	Option	Part #	Price
8000868		ILMENITE 530H 415V	\$13795

Model	
Type	Thicknesser
SKU	8000868
Series	Ilmenite
Part Number	ILMENITE 530H 415V
Brand	ToughCut
Size	530mm (21")
Technical - Main	
Power Source	415V 50Hz Three Phase
Blade Type	Spiral Head Cutter Block
Blade Width	530mm (21")
Cutting Capacity - Height	300 mm
Technical - Spiral Head Cutter Block	
Blade- Cutter Head Block - Blade Size	15mm x 15mm x 2.5mm (150mm Radius)
Blade - Cutter Head Block - Diameter	117 mm
Blade - Cutter Head Block Speed (RPM)	5500
Blade - Cutter Head Block - No. of Blades / Tips	92
Dimensions	
Product Weight (Net Weight)	526 kg
Country of Origin	
Designed, Researched & Developed in	Australia
Manufactured in	China
Features	
Variable Speed	✓
Safety	
Emergency Stop Switch	✓
Warranty	
Warranty	1 Year
Packaging + Shipping	
Shipping Length	1120 mm
Shipping Width	1150 mm
Shipping Height	1300 mm
Shipping Weight (Gross)	640.0 kg
Requires a Skid to Ship	✓
Requires a Forklift / Tail Lift to Unload	✓
Shipping Notes	This product exceeds hand unloading limits and requires a tail lift truck or forklift at the unloading location (Receivers end). This product requires a skid / pallet / crate in order to safely transport via road.