



75MM HSS ADJUSTABLE CIRCLE CUTTER 5010A BY STAR-M

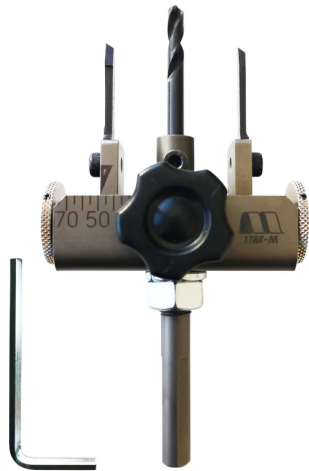

SKU	Option	Part #	Price
8722291		5010A	\$140

Model	
Type	Circle Cutter
SKU	8722291
Part Number	5010A
Barcode	4962660500602
Brand	Star-M
Size	75mm (3")
Technical - Main	
Capacity	25-75mm (Hole Size)
Cutting Capacity - Depth	60mm (Both Faces)
Material	High Carbon Steel (Body)
Country of Origin	
Manufactured in	Japan
Packaging + Shipping	
Shipping Weight (Gross)	1.48 kg

Ideal for Ceiling Light Installations (LED) and narrow spaces such as plumbing of sinks etc in bathrooms and kitchens.

Features:-

Range in size 25mm to 75mm.

CLT-28mm thickness.

Smooth and speed work by twin-blades.

Easy size adjustment without tools.

New model of Small diameter Adjustable Circle Cutter.

Work for plumbing of sink, bathroom, kitchen in narrow space.

Applications:-

Suitable for:

Wood

CLT-28mm

Recommended Tools:-

Electric Power Drill

Please do not use concrete (hammer) drill, Quick Changing Impact Driver.

Capacity:-

Hole sizes 25mm - 75mm.

Applicable depth ¼ Single face 28mm / Both face 56mm

RPM Range: Less than 1500RPM

Optional Accessories:-

Replaceable Blade: 5010A-K (2Pce Set)

Replaceable Centre Drill: 5010A-CD 6mm Bit

Q+A:-

Q: A little flappy fitting on the blade.

A: This is allowed tolerance for quality. No problem.



23 Exhibition Drive, Malaga Western Australia

Monday - Friday 7am-5pm + Sat 8am-4pm

Sales Centre for Sales, Advice + Orders

T +61 8 9209 7400

hello@beyondtools.com

Technical Data:-

Download Full Brochure Here.

Download Brochure for Full Adjustable Circle Cutter Series Here.

5010A-OP1 Center Drill set screw	M5	—5	1
5010A-OP2 Black Handle	1/4"	1	1
5010A-OP3 Spare Blade set screw	1/4"	1	1

How To Use:-

How to adjust the size

- **Loosen the Black Handle for both side.**
- **Either using adjustable handle to decide target size.**
- **Set with guide for scale mark. (Scale mark is only as a guide)**
- **Fixed both of black handle.**

Please Note - This model has been used with the finely adjusted screw for not attaching the dust and minimized its malfunctioning. When the move has been become dull, use the air duster to eliminate the dust.