



23 Exhibition Drive, Malaga Western Australia


Monday - Friday 7am-5pm + Sat 8am-4pm

Sales Centre for Sales, Advice + Orders

T +61 8 9209 7400

hello@beyondtools.com

3/16" BRIGHT CARDED HSS JOBBER DRILL BIT 2006-3/16S BY BORDO

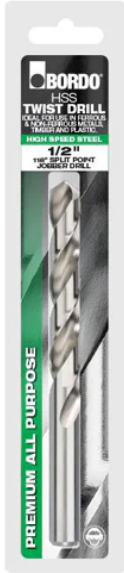

| SKU | Option | Part # | Price |
|-------|--------|------------|-------|
| 35653 | | 2006-3/16S | \$3.8 |

| Model | |
|-------------------------|---------------|
| Type | Drill Bit |
| SKU | 35653 |
| Part Number | 2006-3/16S |
| Barcode | 9326518035701 |
| Brand | Bordo |
| Size | 3/16" |
| Technical - Main | |
| Flute Length | 59mm |
| Workshop (Site) Info | |
| Flute Length | 59mm |
| Packaging + Shipping | |
| Shipping Weight (Gross) | 1.48 kg |
| Quantity Per Pack | 1 |

BORDO METRIC QUICK SILVER M2 HSS JOBBER DRILLS
ANSI B94-11 **118 ° Split Point** (crankshaft point) Split point is self centering and reduces the need for end thrust. Friction at workpiece is reduced. 118 ° point angles are ideal for use in materials such as mild steel and cast iron. The 118 ° point creates easily controlled chips which are wide and thin.

DRILL BIT SURFACE TREATMENT Bright Finish Jobber Drills have no surface treatment and are supplied in the as-ground condition. These tools are suitable for general purpose use, particularly for non-ferrous applications. **Specifications:**

Spindle Speed Stainless Steel RPM: 803

Spindle Speed Tool Steel RPM: 1204

Spindle Speed Cast Iron RPM: 1606

Spindle Speed Malleable Iron RPM: 1807

Spindle Speed Med. Carbon Steel RPM:2007

Spindle Speed Free Cutting Steel RPM: 2877

Spindle Speed Aluminium/Brass RPM: 4082

Spindle Speed Wood/Plastic RPM: 6089

Feed per revolution mm: 0.1